


# HIL-SHRINK® 876 2:1 Heat Shrinkable Tubing 1,6/0,8 blue

876 2:1 dünnwandig, selbstverlöschend

**Product number** 31014-        

**Weight** 0.832kg

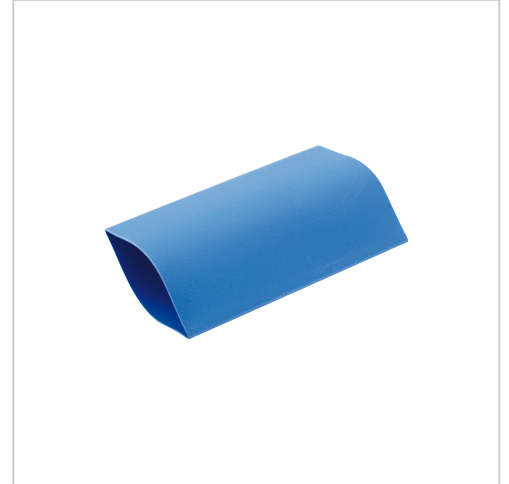

Illustrations are for reference only.  
Technical specifications may vary and  
are subject to change without notice.

## Product description

Thin-walled, very flexible, self-extinguishing shrink tubing. Approved to UL 224 VW1, Mil-I-23053, DEF STAN 59-57 issue 3.

- Shrink ratio: 2:1
- Continuous operating temperature: -55 °C to +125 °C
- Shrink temperature: 100 °C
- Material: Polyolefin radiation cross-linked
- UL

## Product properties

<b>Approvals</b>	Mil-I-23053 , UL 224 , DEF STAN 59-57 Ausg. 3
<b>max after shrink operation Ø d</b>	0,8 mm
<b>Huges after shrink op. s</b>	0,45 mm
<b>min. at delivery Ø D</b>	1,6 mm
<b>Shrink ratio</b>	2:1
<b>Shrinking temperature</b>	100 °C
<b>Material</b>	Polyolefin radiation cross-linked
<b>Continuous operating temperature</b>	-55 °C - 125 °C
<b>Colour</b>	blue
<b>Flexibility</b>	thin-walled
<b>min. at delivery Ø D</b>	1/16 Zoll
<b>material properties</b>	self-extinguishing
<b>Version</b>	Coil
<b>Type of packaging</b>	150

## More images

