
HIL-SHRINK® 2:1 Heat Shrinkable Tubing, 1,2/0,6 blue

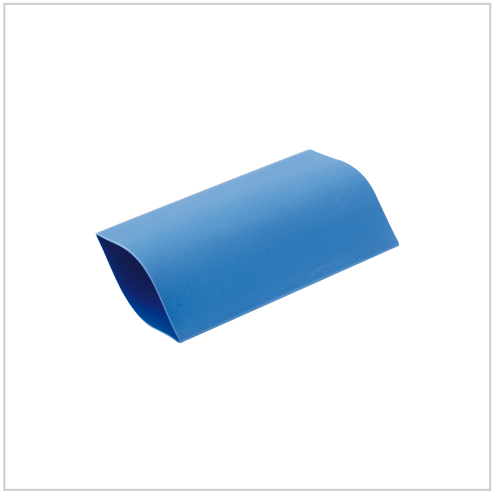

Illustrations are for reference only. Technical specifications may vary and are subject to change without notice.

Product number 30104-_
Weight 0.754kg

Product description

Thin wall flexible heat shrinkable tubings, self extinguishing acc. to UL 224.

- shrink ratio: 2:1
- permanent operating temperature: -55 °C up to +125 °C
- material polyolefin cross-linked
- shrink temperature: +120 °C

Further information:

- ATTENTION: the transparent tubings are not self extinguishing!

Product properties

Shrinking temperature	120 °C
Approvals	UL 224
min. at delivery Ø D	1,2 mm
Huges after shrink op. s	0,45 mm
Shrink ratio	2:1
min. at delivery Ø D	3/64 Zoll
Material	Polyolefin radiation cross-linked
Continuous operating temperature	-55 °C – 125 °C
Colour	blue
Flexibility	thin-walled
material properties	self-extinguishing
Version	Box
max after shrink operation Ø d	0,6 mm
Type of packaging	150

More images

