


HIL-SHRINK® XTF spool 2:1 Heat Shrinkable Tubing 1,2/0,6 blue

Spule

Product number 32204-

Weight 0.694kg

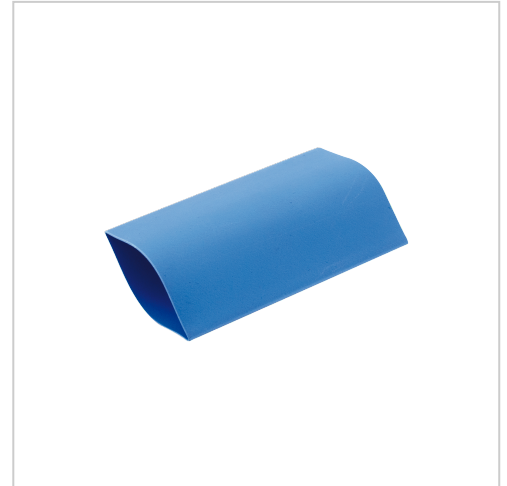

Illustrations are for reference only.
Technical specifications may vary and
are subject to change without notice.

Product description

Zero halogen general purpose heat shrinkable tubing for insulation and protection.
Self-extinguishing. Approval to standard UL 224 (except clear tubings)

- shrink ratio: 2:1
- permanent operating temperature: -55 °C up to +125 °C
- material: polyolefin
- shrink temperature: +125 °C
- UL
- zero halogen

Product properties

min. at delivery Ø D	1,2 mm
Shrinking temperature	125 °C
Shrink ratio	2:1
min. at delivery Ø D	3/64 Zoll
Huges after shrink op. s	0,36 mm
Material	Polyolefin
Continuous operating temperature	-55 °C - 125 °C
Colour	blue
Flexibility	thin-walled
material properties	self-extinguishing , halogen-free
max after shrink operation Ø d	0,6 mm
Version	Coil
Type of packaging	150

More images

