


# UL Double-Action Wire End Sleeve, 2 x 1,0 HL red, 500 pcs. | 500

Doubleaction-Aderendhülsen UL

**Product number** 09049 UL

**Weight** 0.078kg

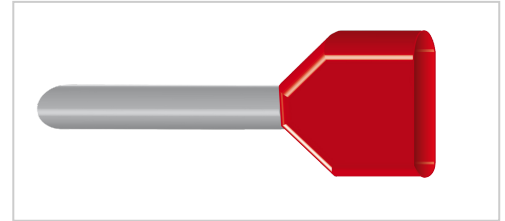

Illustrations are for reference only. Technical specifications may vary and are subject to change without notice.

## Product description

- UL-certified E493101
- feed mouth of polypropylene
- heat-resistant to 105 °C
- easy insertion of two conductors in one end sleeve.
- sizes: K=short, N=normal, HL=half long, L=long
- zero halogen

## Product properties

<b>Insulation material</b>	Polypropylene
<b>AWG</b>	17
<b>d1</b>	2,05 mm
<b>Colour</b>	red
<b>Nominal cross section</b>	2 x 1,0 HL mm <sup>2</sup>
<b>Version</b>	with insulation
<b>S1</b>	0,15 mm
<b>d2</b>	3,2 mm
<b>d3</b>	5,1 mm
<b>UL-Approval</b>	Yes
<b>Identifying Colour</b>	B and DIN
<b>Length</b>	Half-length
<b>I1</b>	17,0 mm
<b>S2</b>	0,30 mm
<b>I2</b>	10,0 mm
<b>Approvals</b>	UL E493101
<b>Type of packaging</b>	500
<b>Insulation material properties</b>	halogen-free

## More images

