


preinsulated Wire End Sleeve for short-circuit proof cables NSGAFÖU, 1,50 HL black

für kurzschlußsichere Leitungen

Product number 09318

Weight 0.052kg

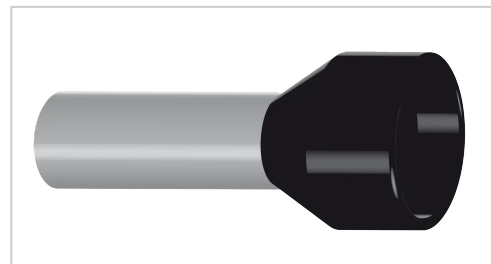

Illustrations are for reference only.
Technical specifications may vary
and are subject to change without
notice.

Product description

Special design with big insulation for all short circuit proof cables. Used for connections in switchgears and distribution boards, rail vehicles, solar systems, ignition cables, etc..

- material: E-Cu, tin plated
- plastic: polyamide
- temperature range: up to max. 120 °C
- long time: 105 °C
- zero halogen

Product properties

Insulation material	Polypropylene
Nominal cross section	1,50 HL mm ²
Type of packaging	100
AWG	16
I1	20 mm
Version	with insulation
Colour	black
S1	0,15 mm
material properties	galvanically tin-plated
d1	1,80 mm
Application area	for short-circuit-proof cables
Material	E-Cu
d3	7,0 mm
S2	0,30 mm
Identifying Colour	DIN
I2	10,0 mm
Insulation material properties	halogen-free

More images

