

# preinsulated Wire End Sleeve for short-circuit proof cables NSGAFÖU, 2,50 HL blue

für kurzschlußsichere Leitungen


**Product number** 09319

**Weight** 0.038kg

## Product description

Special design with big insulation for all short circuit proof cables. Used for connections in switchgears and distribution boards, rail vehicles, solar systems, ignition cables, etc..

- material: E-Cu, tin plated
- plastic: polyamide
- temperature range: up to max. 120 °C
- long time: 105 °C
- zero halogen

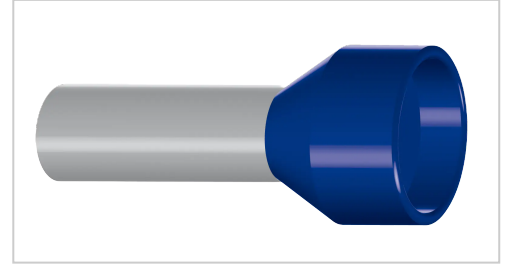

Illustrations are for reference only.  
Technical specifications may vary and  
are subject to change without notice.

## Product properties

<b>Insulation material</b>	Polypropylene
<b>Type of packaging</b>	100
<b>I2</b>	12,0 mm
<b>Nominal cross section</b>	2,50 HL mm <sup>2</sup>
<b>I1</b>	21 mm
<b>Version</b>	with insulation
<b>S1</b>	0,15 mm
<b>material properties</b>	galvanically tin-plated
<b>d1</b>	2,30 mm
<b>d3</b>	7,9 mm
<b>Application area</b>	for short-circuit-proof cables
<b>Material</b>	E-Cu
<b>Length</b>	Half-length
<b>Colour</b>	blue
<b>S2</b>	0,30 mm
<b>Identifying Colour</b>	DIN
<b>Insulation material properties</b>	halogen-free
<b>AWG</b>	14

## More images

