


# UL Wire End Sleeve acc. to DIN 46228, Part 4, 500 pcs. | 500

mit Kunststoffkragen UL

**Product number** 08008 UL

**Weight** 0.042kg

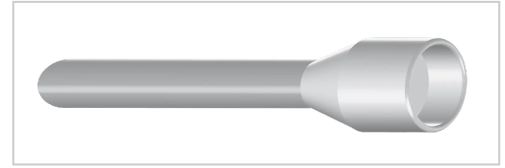

Illustrations are for reference only.  
Technical specifications may vary and  
are subject to change without notice.

## Product description

- UL-certified E493101
- acc. to DIN 46228 part 4 (0,5 up to 50 mm<sup>2</sup>)
- feed mouth of polypropylene
- heat resistant up to 105 °C
- for wire 0,14 up to 50 mm<sup>2</sup>
- sizes: K = short, N = normal, HL = half long, L = long, SL = special length
- zero halogen

## Product properties

<b>Insulation material</b>	Polypropylene
<b>Version</b>	with insulation
<b>S1</b>	0,15 mm
<b>I1</b>	16,0 mm
<b>Identifying Colour</b>	A
<b>UL-Approval</b>	Yes
<b>S2</b>	0,25 mm
<b>Length</b>	Half-length
<b>Nominal cross section</b>	0,75 HL mm <sup>2</sup>
<b>d3</b>	2,8 mm
<b>DIN</b>	DIN 46288 Part 4
<b>AWG</b>	18
<b>d1</b>	1,2 mm
<b>I2</b>	10,0 mm
<b>Approvals</b>	UL E493101
<b>Type of packaging</b>	500
<b>Insulation material properties</b>	halogen-free
<b>Colour</b>	white

## More images

