


# preinsulated Wire End Sleeve for short-circuit proof cables NSGAFÖU, 6,00 N yellow

für kurzschlußsichere Leitungen

**Product number** 09315

**Weight** 0.057kg

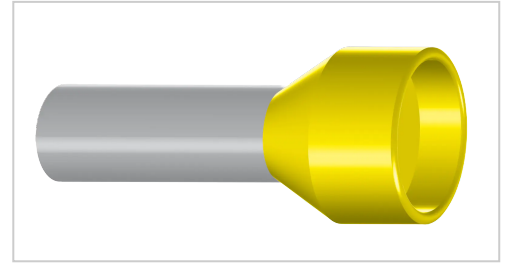

Illustrations are for reference only. Technical specifications may vary and are subject to change without notice.

## Product description

Special design with big insulation for all short circuit proof cables. Used for connections in switchgears and distribution boards, rail vehicles, solar systems, ignition cables, etc..

- material: E-Cu, tin plated
- plastic: polyamide
- temperature range: up to max. 120 °C
- long time: 105 °C
- zero halogen

## Product properties

|                                       |                                |
|---------------------------------------|--------------------------------|
| <b>Insulation material</b>            | Polypropylene                  |
| <b>Type of packaging</b>              | 100                            |
| <b>I2</b>                             | 12,0 mm                        |
| <b>Version</b>                        | with insulation                |
| <b>d3</b>                             | 8,7 mm                         |
| <b>material properties</b>            | galvanically tin-plated        |
| <b>d1</b>                             | 3,60 mm                        |
| <b>S1</b>                             | 0,20 mm                        |
| <b>Application area</b>               | for short-circuit-proof cables |
| <b>Colour</b>                         | yellow                         |
| <b>Material</b>                       | E-Cu                           |
| <b>I1</b>                             | 23,0 mm                        |
| <b>S2</b>                             | 0,30 mm                        |
| <b>Identifying Colour</b>             | DIN                            |
| <b>Length</b>                         | Normal                         |
| <b>Nominal cross section</b>          | 6,00 N mm <sup>2</sup>         |
| <b>AWG</b>                            | 10                             |
| <b>Insulation material properties</b> | halogen-free                   |

## More images

