


preinsulated Wire End Sleeve for short-circuit proof cables NSGAFÖU, 10,00 N red

für kurzschlußsichere Leitungen

Product number 09316

Weight 0.077kg

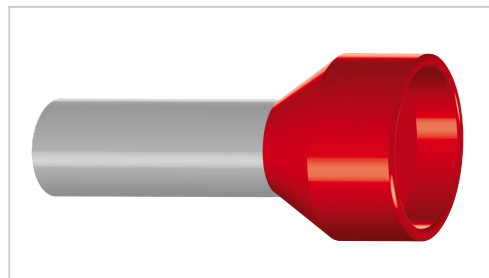

Illustrations are for reference only. Technical specifications may vary and are subject to change without notice.

Product description

Special design with big insulation for all short circuit proof cables. Used for connections in switchgears and distribution boards, rail vehicles, solar systems, ignition cables, etc..

- material: E-Cu, tin plated
- plastic: polyamide
- temperature range: up to max. 120 °C
- long time: 105 °C
- zero halogen

Product properties

Insulation material	Polypropylene
Type of packaging	100
I2	12,0 mm
Colour	red
I1	24,0 mm
Version	with insulation
material properties	galvanically tin-plated
d3	10,2 mm
S1	0,20 mm
Application area	for short-circuit-proof cables
AWG	8
Material	E-Cu
d1	4,60 mm
S2	0,30 mm
Nominal cross section	10,00 N mm ²
Identifying Colour	DIN
Length	Normal
Insulation material properties	halogen-free

More images

