


UL Double-Action Wire End Sleeve, 2 x 1,5 N black, 500 pcs. | 500

Doubleaction-Aderendhülsen UL

Product number 09054 UL

Weight 0.093kg

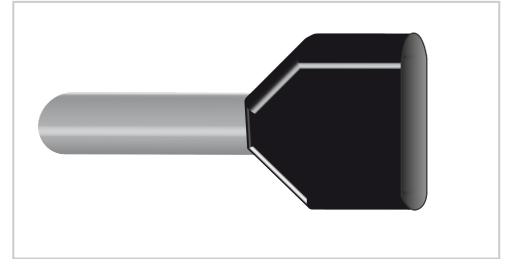

Illustrations are for reference only.
Technical specifications may vary and
are subject to change without notice.

Product description

- UL-certified E493101
- feed mouth of polypropylene
- heat-resistant to 105 °C
- easy insertion of two conductors in one end sleeve.
- sizes: K=short, N=normal, HL=half long, L=long
- zero halogen

Product properties

Insulation material	Polypropylene
Nominal cross section	2 x 1,5 N mm ²
AWG	16
Version	with insulation
Colour	black
S1	0,15 mm
I1	16,0 mm
d2	3,5 mm
d1	2,30 mm
I2	8,0 mm
UL-Approval	Yes
Identifying Colour	B and DIN
S2	0,30 mm
Length	Normal
d3	6,4 mm
Approvals	UL E493101
Type of packaging	500
Insulation material properties	halogen-free

More images

