


preinsulated Wire End Sleeve for short-circuit proof cables NSGAFÖU, 16,00 N blue

für kurzschlußsichere Leitungen

Product number 09317

Weight 0.081kg

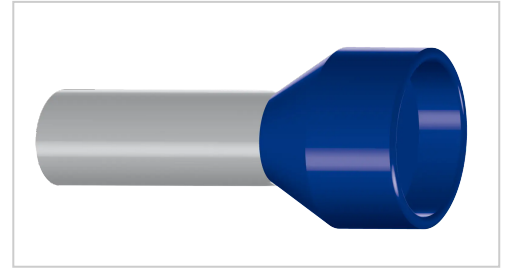

Illustrations are for reference only.
Technical specifications may vary
and are subject to change without
notice.

Product description

Special design with big insulation for all short circuit proof cables. Used for connections in switchgears and distribution boards, rail vehicles, solar systems, ignition cables, etc..

- material: E-Cu, tin plated
- plastic: polyamide
- temperature range: up to max. 120 °C
- long time: 105 °C
- zero halogen

Product properties

Insulation material	Polypropylene
l1	25,5 mm
Type of packaging	100
d3	12,5 mm
Nominal cross section	16,00 N mm ²
l2	12,0 mm
Version	with insulation
material properties	galvanically tin-plated
S1	0,20 mm
Application area	for short-circuit-proof cables
Material	E-Cu
Colour	blue
AWG	6
S2	0,30 mm
Identifying Colour	DIN
Length	Normal
d1	6,00 mm
Insulation material properties	halogen-free

More images

