


HIL-BOX® enclosure system with smooth walls, nylon-hinged screws, grey, 380 x 300 x 120 mm

glatte Gehäusesseiten

Product number 55530

Weight 1.541kg

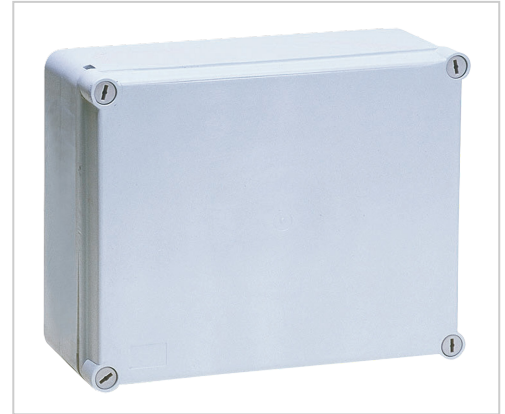

Illustrations are for reference only.
Technical specifications may vary and are subject to change without notice.

Product description

Plain sides hock resistant enclosures with cover fixed by nylon-screws. The unscrewing of the nylon screws allows to open the lid in 2 directions depending on the used screws. The screws are used as hinge and allow a fast opening of the enclosure.

- protection spec.: IP 65 acc. DIN EN 60529
- material: base and lid ABS (UV resistant), transparent lid PC, screws PA
- installation temp.: -15 °C up to +60 °C acc. DIN EN 60670
- temperature resistance: max. +70 °C acc. DIN EN 60695-10-2
- flame protection: 650 °C acc. DIN EN 60695-2-11
- zero halogen

Further information:

- screws included

Product properties

| | |
|--------------------------|--------------|
| G | 80 mm |
| b | 300 mm |
| C | 120 mm |
| Type of packaging | 1 |
| D | 50 mm |
| DIN | DIN EN 60529 |
| Lid colour | gray |
| A | 380 mm |
| Protection spec. | IP 65 |

More images

