


UL Double-Action Wire End Sleeve, 2 x 2,5 N blue, 250 pcs. | 250

Doubleaction-Aderendhülsen UL

Product number 09056 UL

Weight 0.067kg

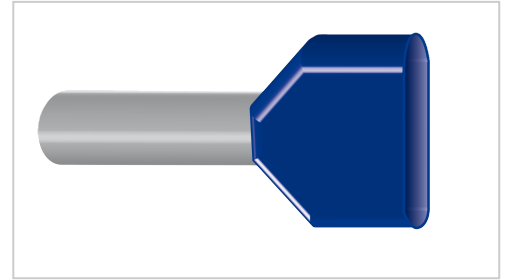

Illustrations are for reference only. Technical specifications may vary and are subject to change without notice.

Product description

- UL-certified E493101
- feed mouth of polypropylene
- heat-resistant to 105 °C
- easy insertion of two conductors in one end sleeve.
- sizes: K=short, N=normal, HL=half long, L=long
- zero halogen

Product properties

Insulation material	Polypropylene
I1	18,5 mm
Nominal cross section	2 x 2,5 N mm ²
d1	2,90 mm
Version	with insulation
S1	0,15 mm
UL-Approval	Yes
Colour	blue
S2	0,30 mm
Type of packaging	250
d3	7,5 mm
Length	Normal
d2	4,0 mm
I2	10,0 mm
Approvals	UL E493101
Insulation material properties	halogen-free
AWG	14
Identifying Colour	A and DIN

More images

