

preinsulated Wire End Sleeve for short-circuit proof cables NSGAFÖU, 2,50 N blue

für kurzschlußsichere Leitungen


Product number 09313

Weight 0.034kg

Product description

Special design with big insulation for all short circuit proof cables. Used for connections in switchgears and distribution boards, rail vehicles, solar systems, ignition cables, etc..

- material: E-Cu, tin plated
- plastic: polyamide
- temperature range: up to max. 120 °C
- long time: 105 °C
- zero halogen

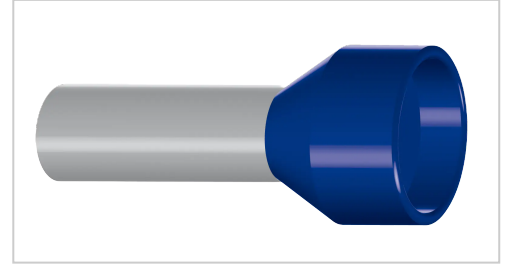

Illustrations are for reference only.
Technical specifications may vary and are subject to change without notice.

Product properties

Insulation material	Polypropylene
Type of packaging	100
Version	with insulation
S1	0,15 mm
material properties	galvanically tin-plated
d1	2,30 mm
l2	8,0 mm
d3	7,9 mm
l1	17,5 mm
Application area	for short-circuit-proof cables
Material	E-Cu
Colour	blue
S2	0,30 mm
Identifying Colour	DIN
Length	Normal
Nominal cross section	2,50 N mm ²
Insulation material properties	halogen-free
AWG	14

More images

