


Locknut for equipotential bonding, brass PG 11

Gegenmutter für Potentialausgleich

Product number 52087

Weight 0.347kg

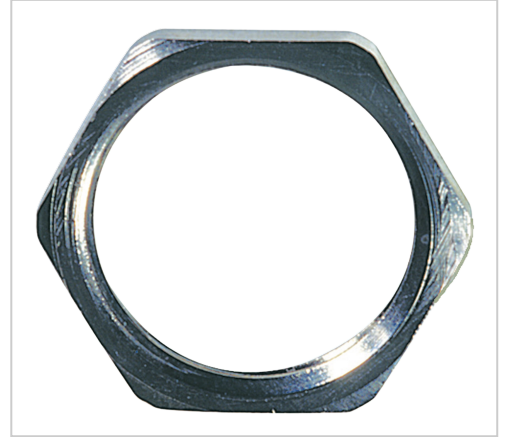

Illustrations are for reference only.
Technical specifications may vary and
are subject to change without notice.

Product description

The 6 teeth of the locknut for equipotential bonding scrape into the insulating layers of paint or powder and create a vibration-resistant contact.

- no surface corrosion
- very low-ohm transition: gland/housing
- no need to clean contact surface
- additional: increases the installed vibration-resistance through frictional connection
- material: brass, nickel-plated
- protection spec.: IP 68
- temperature resistance: -60 °C up to +200 °C

Product properties

| | |
|------------------------------|---------------------|
| Key size | 22 mm |
| Material | Nickel-plated brass |
| Nominal size | PG 11 |
| Thread type | PG |
| Temperature resistant | -60 °C - 200 °C |
| Protection spec. | IP 68 |
| H | 6 mm |
| Type of packaging | 50 |
| D | 18,6 mm |
| Thread (AG) | PG 11 |

More images

