
Identification on Operating Materials, Protective conductor 25 mm

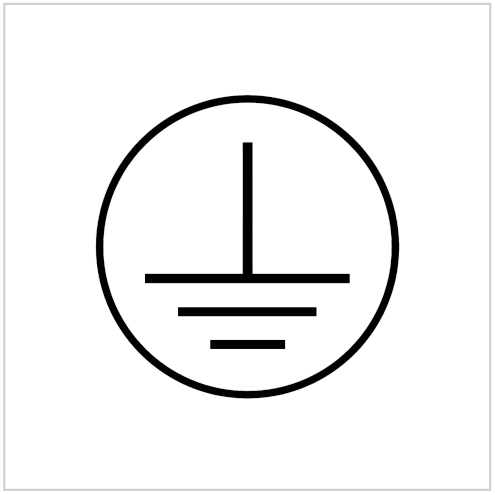

Illustrations are for reference only. Technical specifications may vary and are subject to change without notice.

Product number 41408
Weight 0.007kg

Product description

acc. to DIN 40 009, 40 011, 40 012 part 1, pr EN 50 099 part 2

- material: high-quality polyester-foil with acryl glue
- temperature resistance: -40 °C up to +125 °C
- print protected by liminate

Further information:

- From 12.5 to 20.0 mm also available in rolls of 500 pieces! Add an R after the article no. when ordering.

Product properties

DIN	DIN 40 009 , 40 011 , 40 012
Type of packaging	7 Stk.
Type of packaging	1
Diameter	31,5 mm
Meaning	Protective conductor
Temperature resistant	-40 °C – 150 °C

More images

