


UL Preinsulated wire end sleeves, 0,50 HL white, 500 pcs. | 500

mit Kunststoffkragen UL

Product number 09005 UL

Weight 0.043kg

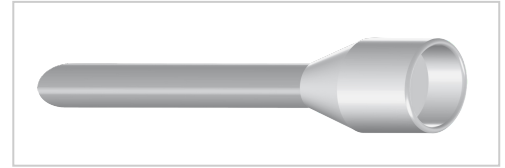

Illustrations are for reference only.
Technical specifications may vary and
are subject to change without notice.

Product description

- UL-certified E493101
- acc. to DIN 46228 part 4 (0,5 up to 50 mm²)
- feed mouth of polypropylene
- heat resistant up to 105 °C
- for wire 0,14 up to 50 mm²
- sizes: K = short, N = normal, HL = half long, L = long, SL = special length
- zero halogen

Product properties

Insulation material	Polypropylene
AWG	20
Nominal cross section	0,50 HL mm ²
Version	with insulation
S1	0,15 mm
I1	16,0 mm
d3	2,6 mm
UL-Approval	Yes
S2	0,25 mm
Identifying Colour	B and DIN
Length	Half-length
DIN	DIN 46288 Part 4
I2	10,0 mm
Approvals	UL E493101
d1	1,0 mm
Type of packaging	500
Insulation material properties	halogen-free
Colour	white

More images

