


Locknut for equipotential bonding, brass PG 36

Gegenmutter für Potentialausgleich

Product number 52092

Weight 0.509kg

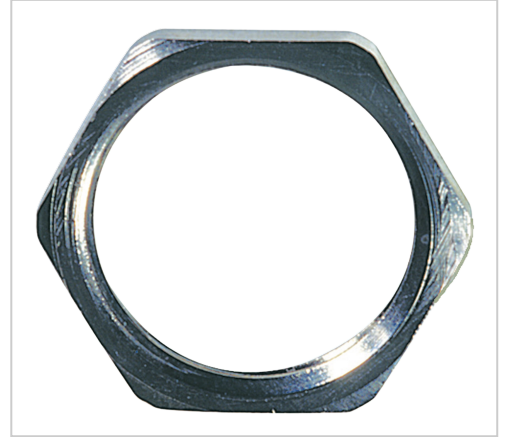

Illustrations are for reference only.
Technical specifications may vary and
are subject to change without notice.

Product description

The 6 teeth of the locknut for equipotential bonding scrape into the insulating layers of paint or powder and create a vibration-resistant contact.

- no surface corrosion
- very low-ohm transition: gland/housing
- no need to clean contact surface
- additional: increases the installed vibration-resistance through frictional connection
- material: brass, nickel-plated
- protection spec.: IP 68
- temperature resistance: -60 °C up to +200 °C

Product properties

Material	Nickel-plated brass
Thread type	PG
Temperature resistant	-60 °C - 200 °C
Protection spec.	IP 68
Key size	50 mm
D	47 mm
Type of packaging	25
Thread (AG)	PG 36
H	7 mm

More images

