


HIL-BOX® enclosure system with smooth walls, nylon-hinged screws, clear, 190 x 140 x 70 mm

glatte Gehäusesseiten

Product number 55501

Weight 0.392kg

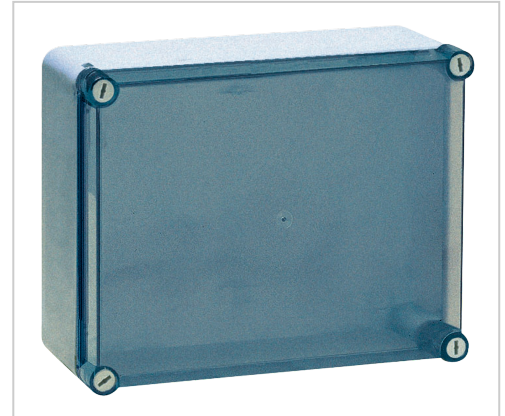

Illustrations are for reference only.
Technical specifications may vary and are subject to change without notice.

Product description

Plain sides hock resistant enclosures with cover fixed by nylon-screws. The unscrewing of the nylon screws allows to open the lid in 2 directions depending on the used screws. The screws are used as hinge and allow a fast opening of the enclosure.

- protection spec.: IP 65 acc. DIN EN 60529
- material: base and lid ABS (UV resistant), transparent lid PC, screws PA
- installation temp.: -15 °C up to +60 °C acc. DIN EN 60670
- temperature resistance: max. +70 °C acc. DIN EN 60695-10-2
- flame protection: 650 °C acc. DIN EN 60695-2-11
- zero halogen

Further information:

- screws included

Product properties

Lid colour	transparent
A	190 mm
Type of packaging	1
G	51 mm
DIN	DIN EN 60529
D	20,5 mm
C	71,5 mm
b	140 mm
Protection spec.	IP 65

More images

