

HP VENT-LINE cable glands, brass nickel-plated, M 20 x 1,5 MS

Ventline Kabelverschraubung Messing

Product number 57000

Weight 0.054kg



Illustrations are for reference only. Technical specifications may vary and are subject to change without notice.


Product description

- material: cable gland: brass nickel-plated, stainless steel, polyamide
- seal: EPDM
- membrane: ePTFE
- protection class: IP 68 to 0,6 bar (to EN 60 529)
- temperature range: -40 °C up to 100 °C, temporarily up to approx. +120 °C

Product properties

SW	24 mm
Protection spec.	IP 68
Type of packaging	1
min. - max. cable diameter	6 - 13 mm
TL	41 - 50 mm
Temperature resistant	-40 °C - 100 °C
Thread type	metric
I	6 mm
Material	Nickel-plated brass
E1	27 mm
Thread (AG)	M 20 x 1,5

More images

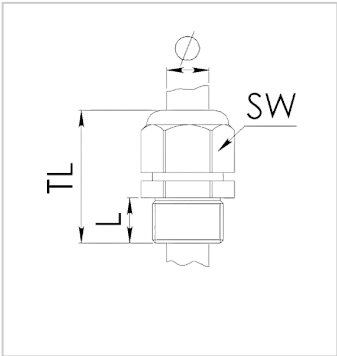

uftd gegenü	chsatz e ne	Verg e	chsp	ung
Innendruck p (bar)	M20 (l/min.)	M25 (l/min.)	M32 (l/min.)	
0,07	0,13	0,16	0,19	
0,10	0,15	0,20	0,25	
0,20	0,26	0,37	0,46	
0,30	0,38	0,54	0,67	
0,40	0,47	0,71	0,89	
0,50	0,57	0,88	1,11	
0,60	0,68	1,05	1,30	
0,70	0,79	1,22	1,59	
0,80	0,89	1,42	1,82	
0,90	1,01	1,63	2,05	
1,00	1,12	1,79	2,32	